

NV5032SC

Low Phase Noise Type
Voltage Controlled Crystal Oscillator (VCXO)

Main Application

For communication equipment for ISDN, SDH/SONET, WiMAX, etc. and Base-stations

Features

- Dimensions: 5.0x3.2mm
- Package: Ceramics
- Low phase noise: Typ. -127dBc/Hz (@1kHz) , Typ. -156dBc/Hz (@100kHz)
in case of 122.88MHz
- Low phase jitter: Typ. 0.13ps (12kHz to 20MHz) in case of 122.88MHz
- Low current consumption: Typ. 46mA in case of 122.88MHz
- Frequency Range : 100MHz to 200MHz
- Output level: LVPECL




Pb Free

RoHS Compliant
Directive 2011/65/EU

Specifications

Item	Model	NV5032SC	
Nominal Frequency Range (MHz)		100 ≤ F ≤ 200	
Standard Frequency (MHz)		122.88, 153.6	
Supply Voltage[V _{CC}] (V)		+3.3 ± 10 %	
Current Consumption (mA)		Max. 65	
Output Level		LVPECL	
Symmetry (%)		45 to 55 (V _{CC} -1.3V)	
Output Load Condition (Ω)		50 (V _{CC} -2.0V)	
Operating Temperature Range (°C)		-40 to +85	
Storage Temperature Range (°C)		-55 to +125	
Overall Frequency Tolerance		Max. ±50 × 10 ⁻⁶	
Frequency Control Range / Control Voltage [V _{cont}]		Min. ±100 × 10 ⁻⁶ / +1.65 ± 1.65 V	
Phase Jitter [RMS] (ps)		Max. 1 (Typ. 0.13) (12kHz to 20MHz)	
Frequency Change Polarity		Positive	
Enable / Disable function		Enable Low Level type	Enable High Level type
Specification Number		NSA3613A	NSA3614A

Dimensions

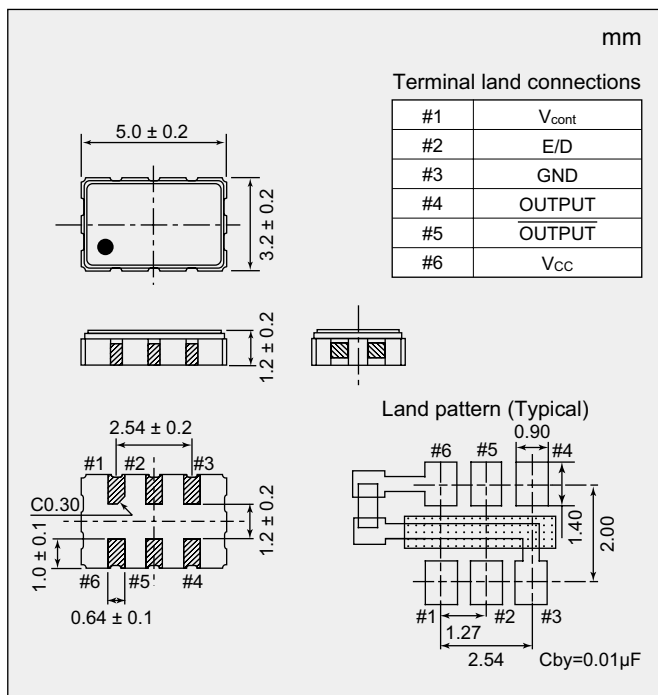

List of Enable / Disable function

Enable Low Level type

Input (#2)	Output (#4)	Output (#5)
High Level (Min. 0.7 V _{CC})	Disable (High Level)	Disable (Low Level)
Low Level (Max. 0.3 V _{CC}) or Open	Enable	Enable

Enable High Level type

Input (#2)	Output (#4)	Output (#5)
High Level (Min. 0.7 V _{CC}) or Open	Enable	Enable
Low Level (Max. 0.3 V _{CC})	Disable (High Level)	Disable (Low Level)

Reference Value

Phase noise (at 122.88MHz)	Offset Frequency	dBc / Hz
	10Hz	Typ. -70
	100Hz	Typ. -100
	1kHz	Typ. -127
	10kHz	Typ. -148
	100kHz	Typ. -156
1MHz	Typ. -156	

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.