

ECX-1247 SMD CRYSTAL

The sub miniature ECX-1247 is a very compact SMD Crystal. The 1.6 x 1.2 x 0.3 mm ceramic package is ideal for today's SMD manufacturing environment.






OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECX-1247			UNITS
		MIN	TYP	MAX	
Frequency Range		24.000		80.000	MHz
Frequency Tolerance	at +25°C			± 20 *	ppm
Frequency Stability	-20 to +70°C			± 30 *	ppm
Shunt Capacitance				5	pF
Load Capacitance	Specify in P/N		8		pF
Drive Level				100	µW
Operating Temperature		-20		+70	°C
Storage Temperature		-40		+85	°C
Aging (Per Year)	@ +25°C ±3°C			±5	ppm

EQUIVALENT SERIES RESISTANCE/MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω
24.00 ~ 31.999	Fundamental	150	38.000 ~ 80.000	Fundamental	80
32.000 ~ 37.999	Fundamental	100			

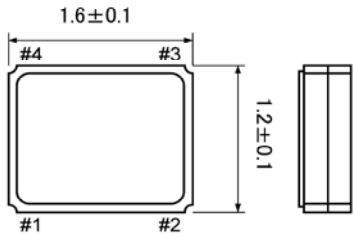

Pad Connections	
1	In/Out
2	Gnd
3	Out/In
4	

